

sikkens



Rubbol[®] Solid Stain



Simply Beautiful[™]
WOOD CARE PRODUCTS

Solid Color
Exterior Wood Stain
for Siding, Trim
& more



Rubbol® Solid Stain

Rubbol is Simply Beautiful

Rubbol Solid Stain is designed for both the professional painter and the “do-it-yourself” homeowner. Its versatility and high performance make it the ultimate choice for most exterior wood surfaces and a great choice for almost any type of lumber.

Exterior Surfaces

- Siding
- Shakes
- Shingles
- Fences
- Log Siding


Lumber

- Cedar
- Pine
- Spruce
- Fir
- Exterior Plywood, such as T 1-11 board



One Coat Coverage

Rubbol Solid Stain is designed to be applied in as little as one coat to preserve, protect and enhance the beauty of your home. In fact, Rubbol Solid Stain’s superior coverage often eliminates the need for a primer. This allows for minimal preparation time, making for easy applications that are typically as much as one-third faster than the competitors’ products.

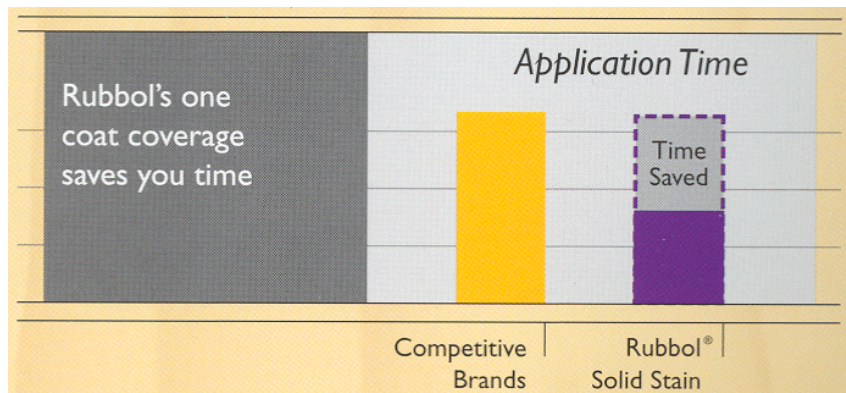

Color & Finish

Rubbol Solid Stain is available in a variety of beautiful colors from The Rubbol Color Collection. Its lightfast formula and outstanding chalk resistance ensure the color retention and long-term beauty of your wood surface.

Refinish & Protect

Refinishing a wood surface with Rubbol Solid Stain overcomes the numerous challenges presented when recoating an existing finish. That’s the beauty of using Rubbol Solid Stain, it covers any potential problem. Due to its incredible versatility, Rubbol Solid Stain can be applied over faded or chalked surfaces. Rubbol Solid Stain also protects your wood by blocking out moisture that may cause rotting or fungal growth.

Working With Rubbol® Solid Stain

■ Preparation Procedures

All types of vertical surfaces:

New, Weathered, Uncoated, Previously Coated Wood

The best method to prepare vertical wood surfaces is to sand with 80-120 grit sandpaper. However, an alternate to sanding for preparation is listed below.

Cleaning Recommendation

1. Spray the surface with clean water, wetting the wood.
2. Clean the surface with a solution of 4 ounces of 100% powdered Tri-Sodium Phosphate (TSP) or phosphate-free substitute plus 1 quart of liquid bleach in 3 quarts of water. Apply this solution generously to the wood with a garden pump sprayer.
3. Let the solution sit on the wood for 15-20 minutes. During this period, scrub the surface with a hard bristle brush to help remove mill glaze and/or weathering. Do not let the solution dry on the wood. Keep it wet.
4. Power wash the cleaning solution from the wood with clean water. To prevent damaging the wood, do not exceed 500 psi. The nozzle must be a maximum of 1 foot from the surface for full effectiveness.
5. Let the surface dry for 3 good dry days before application (i.e. the moisture content is below 21%).

Notes: Rough-sawn wood should be dry-brushed using a brush with stiff bristles to remove loose dirt and fibers, if debris is still present then follow the preparation procedures.

Weathered wood affected with blue fungi or rust from nails may be treated after the surface preparation by applying a solution of 4 ounces of oxalic acid crystals in 1 gallon of warm water. This solution should be allowed to sit on the affected areas for 15-20 minutes before the final rinse with clean water. Let dry for 3 good dry days before coating. Fill all joints, cracks and nail holes with a good quality polyurethane or acrylic filler prior to applying the coating.

■ Application Procedures

New / Bare wood application

1. Follow the preparation procedures
2. Apply one coat of Rubbol Solid Stain
3. Let surface dry for minimum of 24 hours
4. Apply one coat of Rubbol Solid Stain

Previously coated surfaces

1. Follow the preparation procedures
2. Apply one coat of Rubbol Solid Stain

Maintenance Procedures

System maintenance consists of applying one coat of Rubbol Solid Stain as visually necessary. On the average, this will be five (5) years depending on the level of exposure to the elements.

1. Follow the preparation procedures using 2 ounces of 100% powdered Tri-Sodium Phosphate or phosphate-free substitute. Let surface dry 48 hours.
2. Apply one coat of Rubbol Solid Stain.

Application Do's

Apply when the surface and air temp is 50°F/10°C to 95°F/35°C

Saturate all end grains

Apply a liberal coat

Maintain a wet edge

Apply in the direction of the grain

Back Prime (if possible)

Application Don'ts

Do not apply in direct sunlight

Do not apply when the surface is hot to the touch

Do not apply when dew or frost is present

Do not apply in wet weather

Do not apply when the moisture content of the wood is greater than 21%



For our complete
color selection see the
**Rubbol Color
Collection**



Rubbol® Solid Stain

Rubbol Solid Stain is an exterior solid product, which allows you to finish, protect and revive the beauty of your home with less labor and material costs. An affordable quality stain that is quick and easy to apply, Rubbol Solid Stain is a superior choice to make your home *Simply Beautiful*.



Simply Beautiful™